

**Features:**

- Offers universal compatibility with all HID proximity readers.
- Provides durable packaging and consistent read range.
- Provides an external number for easy identification and control.
- Supports formats up to 85 bits, with over 137 billion codes.
- Custom pre-printed artwork available.
- A PVC overlay allows for on-site photo ID using most direct image printers.
- Using HID's ProxProgrammer®, card vendors can ship ProxCard II proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

**THE RF-PROGRAMMABLE PROXCARD® II PROXIMITY ACCESS CARD IS THE INDUSTRY CHOICE FOR A COST-EFFECTIVE SOLUTION TO PROXIMITY ACCESS CONTROL.**

- **Proven, Reliable Technology** – Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
- **Convenient To Use** – Can fit into a wallet or purse. Use with a strap and clip as a photo ID badge.
- **Cross-reference** – A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
- **Security** – Offers over 137 billion unique codes.
- **Long Life** – Passive, no-battery design allows for an infinite number of reads.
- **Durability** – Strong, flexible and resistant to cracking and breaking.
- **Companion Products**– 1321 Photo pouch overlay  
1324 PVC Direct print overlay


The RF-programmable ProxCard® II proximity access card is the industry choice for a cost-effective solution to proximity access control.

## SPECIFICATIONS

### ProxCards® II Card

<b>Base Part Number</b>	1326
<b>Typical Maximum* Read Range</b>	ProxPoint® Plus reader-up to 3" (7.5 cm) MiniProx® reader-up to 5.5" (14 cm) ThinLine® II reader-up to 5.5" (14 cm) ProxPro® reader-up to 8" (20 cm) ProxPro® II reader-up to 9" (22.9 cm) Prox80™-up to 5.5" (14 cm) MaxiProx® reader-up to 24" (60 cm)
<b>Dimensions</b>	2.135" x 3.385" x 0.075" MAX. (5.4 x 8.6 x 0.19 cm)
<b>Operating Temperature</b>	-50° to 160° F (-45° to 70° C)
<b>Options</b>	External card numbering (inkjet only; no laser engraving) Custom artwork (text or graphics)
<b>Weight</b>	0.24 oz. (6.8 gm)
<b>Warranty</b>	Lifetime

NOTES:  
\*Dependent on local installation conditions.

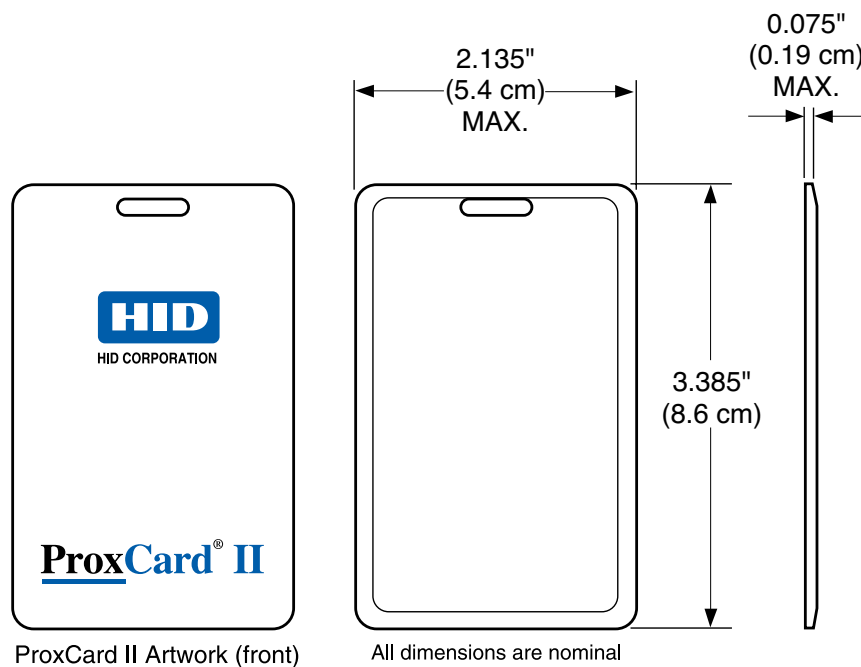

North America: +1 949 732 2000  
 Toll Free: 1 800 237 7769  
 Europe, Middle East, Africa: +44 1440 714 850  
 Asia Pacific: +852 3160 9800  
 Latin America: +52 55 5081 1650

**ASSA ABLOY**  
 An ASSA ABLOY Group brand

© 2011 HID Global Corporation. All rights reserved. HID, the HID logo, ProxCards logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks and product or service names are trademarks or registered trademarks of their respective owners.  
 2012-05-14-hid-proxcardii-cards-ds-en